




- Suitable for top / center-pivoted / hopper window , casement window ,heavy skylight open or closing ;
- Simple but delicacy design
- Fixed and movable installation suitable for all kind of windows ;
- Smooth and strong output ;
- Electronic overload cutoff;
- Use control box to operate synchronously;
- Endurance tests (30,000 cycles ) are carried out ;
- Strokes can be tailor-made as requirement ;
- Standard color is grey and color can be tailor –made ;

Specifications	Units	Technical Data
		AT-06(DC)
Thrust / Relay	N	600N/900N
Maximum operating current	A	1.0/1.2
Travel distance	mm	50~1000
Promote the speed of	mm/sec	~6
Operating voltage	V	DC24V ± 10%
Ambient temperature	°C	-20~+75
Protection class	IP	65

## Dimensions



## Installation

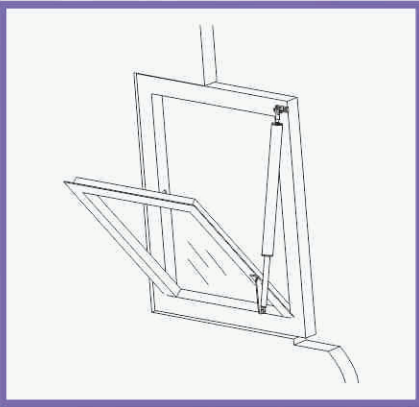

## Job Reference

