


G2 ELECTRIC DOUBLE LINK CHAIN ACTUATOR




DIMENSION

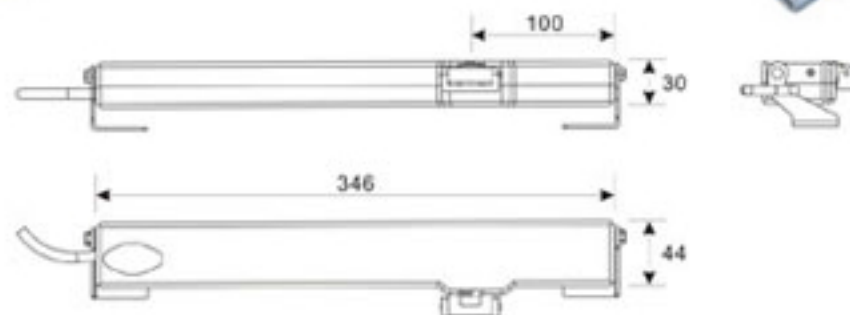


APPLICATION AND INSTALLATION

- G2 Electric Double Link Chain Actuator can be applied to the top and bottom hung window, central and horizontal opening, skylight and alike.
- Installation of G2 is flexible. It can be installed with or without window sill situation by suitable brackets.

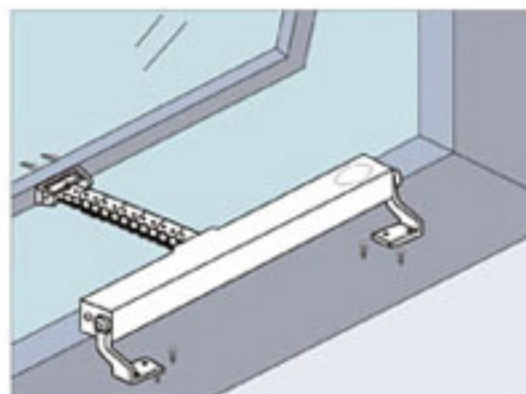

With Window Sill

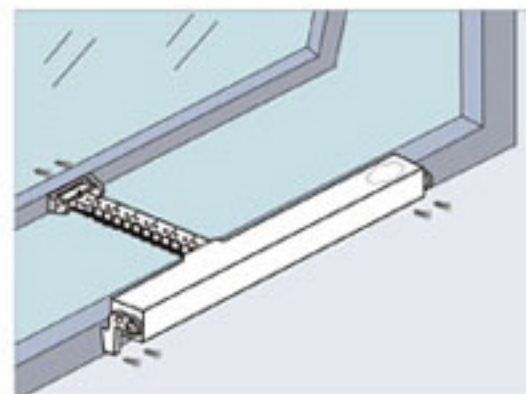

Without Window Sill

FEATURE

- Electronic overload cutoff, limit stop and low noise operation
- Standard double link chain or corrosion-protected double link chain in stainless steel
- Endurance tests (20,000 cycles) are carried out
- Built-in window open and close button (optional)
- Lock force in static motion is 4,500 N
- Voltage supply 24V DC \pm 10%
- Max push and pull force: 250N

Specification	Unit	Technical Data
Voltage supply	V	24V DC \pm 10%
Push and pull force	N	250
Max current absorption	A	0.6
Stroke	mm	300
Speed	mm/sec	6
Working temperature	°C	-15~+75
Protection class	IP	32

ACCESSORIES



Sill Bracket

or



Wing Bracket

+



Fixed Bracket

ILLUSTRATION

